

SFI

SHELTER FOREST
INTERNATIONAL

Typical Face (4' x 8')



DETAIL:

DESCRIPTION:

5.5mm IntegraPly™ Engineered
Underlayment

THICKNESS:

1/4" Nominal Size (5.5mm) with a
.3mm tolerance

FACE VENEERS:

NZ Pine with a
.35mm minimum face thickness
B Grade WPF NZ Pine back with a
.35mm minimum thickness

Both face and back feature a whole piece or
one piece face with no joints in the face
veneer. Backs Also include a nailing
pattern, see IntegraPly™ brochures for
more detail.

CORE:

3 - Ply Stitched and Jointed,
with calibrated core (5-ply total)

GLUE:

Melamine Fortified, WBP,
CARB2, and Title VI Complaint

PACKAGING:

160 Sheets / Unit



See Reverse for Back




5.5mm IntegraPly™

Typical Back (4' x 8')



CORE:

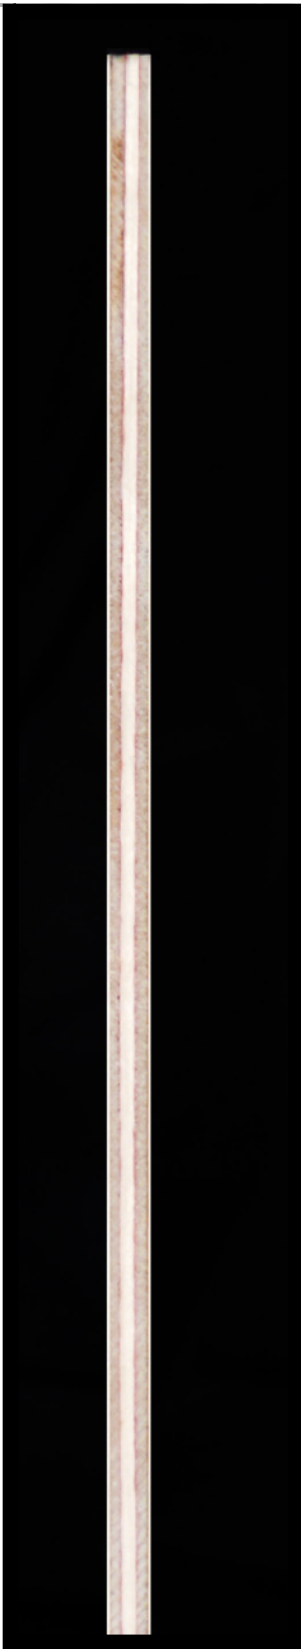

⬅ See Reverse for Face